Model Name:

Basic PDU

Features:

Power Management:



Overload Protection

When overload, circuit breaker will automatically trip to protect the safety of electricity.

Power Management Upgrade: (Works with CPM, the following are CPM functions)



Remote Monitor

Remote monitoring PDU status by web and SNMP



Threshold Sensing

User-definable warning and overload threshold value as the basis for alarm.



Environment Detection

Optional accessory probe to detect temperature and humidity. (available by model)



Mail Notification

Notify specified user by mail and SNMP when outlet action or current over threshold.



Central Management

Free centralized monitoring software, real-time monitoring of a large number of PDU, provide data records and history chart.

Model Number:

B1H-1023J-08N1





Plug

Specification


Output		Input	
Voltage Max. Current Outlet Overload Protection	200-240 VAC 10 A (8) C13 (1) 10A UL1077 breaker	Voltage Frequency Max. Capacity Connection Power Ind.	200-240 VAC 50/60Hz, full range 2400 VA C14, power cord, 3m (1) Green LED
Measurement		Other	
None		CPM Link CPM Link Ind.	(1) RJ11 (1) Yellow LED
Dimension/Weight		Operation	
Net size Net weight Package Size Package Weight	432 x 44 x 44 mm 1.21 kg 505 x 140 x 90 mm 1.43 kg, 2 pc per box	Operation Temp. Operation Humid. Storage Temp. Storage Humid.	0 ~ 45℃ 0% ~ 90% RH -20℃ ~ 65℃ 0% ~ 90% RH
Approval			
Certification Warranty	CE 2 years		

Package

No.	Description.		
1	PDU 1 set		
2	Rack mount accessories 1 set		
3	Manual by link below		
	नि १४ ८४ नि		




Optional Accessory



Line Drawing



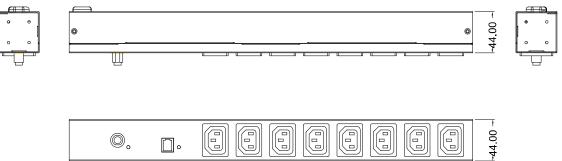

0. 432.00