

## Model Name:

### Elite POKO PDU **Adv.**

Elite POKO PDU can monitor the power usage information of input and each output port from the remote end through the Internet to fully understand the power consumption, including V, A, Hz, PF, W, VA and kWh. Set up overload event alerts and notify managers via Email and TRAP, allowing managers to respond to crises in the shortest possible time to minimize disasters.

The PDU has two environmental sensor ports that track climate information: temperature and humidity environment variables. The data is available from any web browser and is SNMP-compliant for easy tracking of critical data without the use of any external software.

Provide central management software, which can manage a large number of PDUs' power, temperature and humidity information. The database stores the power consumption information of the power strip and provides the history curve chart for the manager's reference.

It provides an advanced function which is to manage up to 8 PDUs by a single IP address. It means administrators can monitor and control multiple PDUs through one web interface.

## Features:

### System Function:

- Built-in embedded system:  
Support 10/100M Ethernet interface, provides webpage and SNMP remote management.
  - Local display information:  
OLED can display current, voltage, kWh, IP, temperature and humidity information.
  - Multiple protocols:  
Support ICMP, ARP, IP, TCP, UDP, DHCP, HTTP, HTTPS, FTP, NTP, SNMP v1/2/3, TLS1.3, IPv4 and IPv6, Telnet, SSHv2
  - Management Account Certification:  
Radius certification support.
  - Multi-account management:  
Multi-group account management system. And provide three-tier permission management.
  - IP filtering:  
Support IP filtering, improve network security mechanisms.
  - Power record:  
Store up to 100000 power and event data.
  - Daisy Chain:  
Support cascading management.
  - Remote firmware upgrade:  
Provides remote firmware upgrade mechanism.
  - System operation message:  
Send the normal operation of the message automatically by trap.
  - Hardware key definition:  
User-definable button function.
  - Temperature unit conversion:  
Temperature units can choose Celsius or Fahrenheit
  - System configuration restore:  
Support the output of the system settings, to easily deploy a large amount of the same model of PDU.
  - Multilingual Support:  
Support Chinese, English, French, German, Spanish, Russian, Czech, Arabian, Persian.
  - USB Option:  
Support external USB network dongle, support wireless or Ethernet.
  - Hot-Swap: the replacement of network module without shutting down the PDU
-

**Power Management:**



REMOTE MONITOR

**Remote Monitor**

Remote monitoring PDU status by web and SNMP



PER OUTLET MONITOR

**Outlet-Level Monitor**

Remote per outlet monitor V, A, Hz, PF, W, VA, kWh



KWH MEASUREMENT

**kWh Measurement**

Voltage, frequency, power factor, active power, apparent power and kWh measurement.



MAIL NOTIFICATION

**Mail Notification**

Notify specified user by mail and SNMP when outlet action or current over threshold.



THRESHOLD SENSING

**Threshold Sensing**

User-definable warning and overload threshold value as the basis for alarm.



EVENT ALERT

**Event Alert**

When current exceeds the preset threshold, PDU will beep and LED will flash.



Breaker Detection

**Circuit Breaker Detection**

PDU can detect whether breaker is tripped due to the power event. Display and notify the manager of breaker status accordingly



OVERLOAD PROTECTION

**Overload Protection**

When overload, circuit breaker will automatically trip to protect the safety of electricity.



CENTRAL MANAGEMENT

**Central Management**

Free centralized monitoring software, real-time monitoring of a large number of PDU, provide data records and history chart.

**Optional Functions:**



ENVIRONMENT DETECTION

**Environment Measurement**

Optional accessory probe-ENV to measure temperature and humidity.




DUAL ETHERNET

**Dual Ethernet**

Optional accessory- USB to RJ45 dongle accessory, providing dual network channels.

## Model Number:

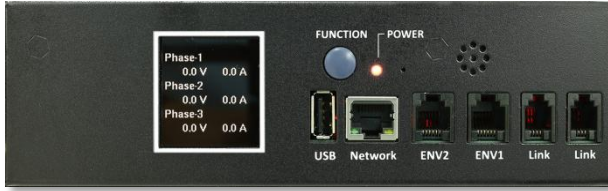


**PAL-6340T-12KA**



## Specification

| Output              |  | Input              |                          |
|---------------------|--|--------------------|--------------------------|
| Voltage             | 200-240 VAC                                      | Voltage            | 400 VAC, 3 Phase 3P+N+PE |
| Max. Current        | 63 A per phase                                   | Frequency          | 50/60Hz, full range      |
| Outlet              | (12) C19   | Max. Capacity      | 43.4 kVA                 |
| ON/OFF Ind.         | (12) Green LED                                   | Connection         | Terminal block           |
| Threshold Ind.      | (12) Red LED                                     | Power Ind.         | (1) Red LED              |
| Overload Protection | (6) 16A UL489 breaker                            |                    |                          |
| Measurement         |  | Other              |                          |
| Current             | +/- 1%+/-0.1A @0.2A ~ 32 A                       | ENET Connection    | (1) RJ45                 |
| Voltage             | +/- 1% +/- 1V @80V~250V                          | ENV Connection     | (2) RJ11                 |
| Active Power        | +/- 1% +/- 5W @50W~8000W                         | Function Selection | (1) Button               |
| Apparent Power      | +/- 1% @50VA~8000VA                              | Daisy Chain        | (2) RJ22                 |
| Frequency           | +/- 1% @50~65Hz                                  | WIFI Ready         | (1) USB                  |
| Power Factor        | +/- 1% @0.1~1.0                                  | Info. Display      | Monochrome OLED          |
| kWh                 | .001kWh~99999.999kWh, (+/- 1% @50W~8000W) kh=1.0 |                    |                          |
| Dimension/Weight    |  | Operation          |                          |
| Net Size            | 1778 x 88 x 90 mm                                | Operation Temp.    | 0 ~ 50°C                 |
| Net Weight          | 16 kg  | Operation Humid.   | 0% ~ 95% RH              |
| Package Size        | 1890 x 220 x 110 mm                              | Storage Temp.      | -20°C ~ 65°C             |
| Package Weight      | 18.4 kg  | Storage Humid.     | 0% ~ 95% RH              |
| Approval            |  |                    |                          |
| Warranty            | 2 years  |                    |                          |

## Package

| No. | Description  |
|-----|--|
| 1   | PDU 1 set  |
| 2   | Rack mount accessories 2 sets<br>             |
| 3.  | RJ22 to R22 cable for daisy chain, 1 sets<br> |
| 4   | Software, manual, MIB by link below<br>     |

## Optional Accessories

| Model Number | Model Name   |
|--------------|--|
| CPM-ENV-2    | Temp./Humidity probe<br>  |
| STR-C20-B    | C19 socket protection<br> |
| CPM-USB-1    | USB to WIFI Dongle<br>    |
| CPM-USB-2    | USB to Ethernet<br>       |

## Line Drawing

